

# **Sediment Formation in Nearshore Environments: Strength, Rheology, Microstructure, and Stability**

Homa Lee  
U.S. Geological Survey  
345 Middlefield Road  
Menlo Park, CA 94025  
phone: (650) 329-5485, fax: (650) 650-5198, email: [hjlee@usgs.gov](mailto:hjlee@usgs.gov)

Award Number: N00014-04-IP-20069  
<http://geopubs.wr.usgs.gov/open-file/of01-190/of01-190/>

## **LONG-TERM GOALS**

Our goals are to understand how geotechnical and physical properties develop in marine sedimentary deposits on continental margins and how these properties influence sediment transport processes and the development of geomorphology. Our studies include predicting stability of sediment on the continental shelf and slope, providing input parameters for models of sediment transport and deformation, and distinguishing morphologic features caused by slope failure from those caused by other gravity-driven processes. Our studies also include improving our understanding of the transition between initial slope failure and the development of debris flows and turbidity currents and predicting the rheological properties that determine the dynamics of such flows. We plan to apply our studies to the EuroSTRATAFORM project, within which we collaborate with scientists seeking to model the formation and alteration of nearshore sedimentary bodies.

## **OBJECTIVES**

Our main objectives for FY05 focused on:

- (1) understanding the ways in which sediment bodies develop shear strength, rheological properties and structure;
- (2) test shear strength development models in controlled environments,
- (3) further the development of the concept of seismic and biologic strengthening;
- (4) relate regionally distributed geotechnical properties to index properties that can be determined easily or, potentially, mapped remotely;
- (5) assess the signatures of catastrophic events to determine whether they are produced by deformational (landsliding) or depositional (turbidity current sediment waves) processes, with a particular attention to the Cap de Creus Canyon;
- (6) provide the scientific community the rheological properties of fully deformed sediment masses to be used by turbidity current and debris flow modelers.

<b>Report Documentation Page</b>			Form Approved OMB No. 0704-0188	
<p>Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p>				
1. REPORT DATE <b>30 SEP 2005</b>	2. REPORT TYPE	3. DATES COVERED <b>00-00-2005 to 00-00-2005</b>		
<b>4. TITLE AND SUBTITLE</b> <b>Sediment Formation in Nearshore Environments: Strength, Rheology, Microstructure, and Stability</b>			5a. CONTRACT NUMBER	
			5b. GRANT NUMBER	
			5c. PROGRAM ELEMENT NUMBER	
<b>6. AUTHOR(S)</b>			5d. PROJECT NUMBER	
			5e. TASK NUMBER	
			5f. WORK UNIT NUMBER	
<b>7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)</b> <b>U.S. Geological Survey, 345 Middlefield Road, Menlo Park, CA, 94025</b>			8. PERFORMING ORGANIZATION REPORT NUMBER	
<b>9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)</b>			10. SPONSOR/MONITOR'S ACRONYM(S)	
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
<b>12. DISTRIBUTION/AVAILABILITY STATEMENT</b> <b>Approved for public release; distribution unlimited</b>				
<b>13. SUPPLEMENTARY NOTES</b> <b>code 1 only</b>				
<b>14. ABSTRACT</b> <p><b>Our goals are to understand how geotechnical and physical properties develop in marine sedimentary deposits on continental margins and how these properties influence sediment transport processes and the development of geomorphology. Our studies include predicting stability of sediment on the continental shelf and slope, providing input parameters for models of sediment transport and deformation, and distinguishing morphologic features caused by slope failure from those caused by other gravity-driven processes. Our studies also include improving our understanding of the transition between initial slope failure and the development of debris flows and turbidity currents and predicting the rheological properties that determine the dynamics of such flows. We plan to apply our studies to the EuroSTRATAFORM project, within which we collaborate with scientists seeking to model the formation and alteration of nearshore sedimentary bodies.</b></p>				
<b>15. SUBJECT TERMS</b>				
<b>16. SECURITY CLASSIFICATION OF:</b>			<b>17. LIMITATION OF ABSTRACT</b> <b>Same as Report (SAR)</b>	
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>	18. NUMBER OF PAGES <b>7</b>	19a. NAME OF RESPONSIBLE PERSON

## APPROACH

Our research focuses on the geotechnical changes that occur to sediment as it is buried under the seafloor. These changes include the direct influence of burial, the impact of repeated seismic shaking (seismic strengthening), and the effects of biological activity (biological strengthening). Part of this analysis also relies on obtaining information on non-bioturbated, normally consolidated sediments via SEDCON (SEDimentation-CONsolidation) tests which can be integrated into geotechnical profiles as a reference curve enabling us to extract the relative influence of bioturbation and/or seismic strengthening. We use samples taken in connection with the EuroSTRATAFORM project in the Adriatic Sea and Gulf of Lions as well as synthetic sediment produced in the laboratory (SEDCON). We also determine the sediment microstructure using SEM techniques and mercury microporosimetry. We compare field geotechnical and microstructure profiles with those developed in the laboratory following the application of compressive loads. This will help ascertain the significance of seismic and biological strengthening in altering geotechnical profiles. Some of the observed behavior, when evaluated on cores, may have been influenced by the effect of gas dissolution leading to sample disturbance. This is being evaluated by coupling CATSCAN imaging and geotechnical properties of the cores obtained as part of EuroSTRATAFORM and PROMESS projects with *in situ* penetration test results available as part of the PROMESS project.

Key individuals, at the USGS: Homa Lee, Dianne Minasian, Pete Dartnell, and Kevin Orzech: physical property logs of sediment cores and relations between geotechnical and classification properties, algorithms relating sediment properties, environmental factors, and slope stability within the framework of a GIS, and strength development from seismic shaking; at Laval: Jacques Locat, Marie-Claude Lévesque, Serge Leroueil, Geneviève Cauchon-Voyer, Mylène Sancoucy and Pierre Therrien: strength and compressibility measurements, SEM studies, rheology measurements, and simulation of sediment accumulation. Partners in Europe are N. Sultan (France), M. Canals and R. Urgeles (Spain), and F. Trincardi (Italy). D. Orange, partner in EuroSTRATAFORM has also been participating in our work.

## WORK COMPLETED


During FY 05, we completed the work related to the effect of bioturbation on strength development (Lévesque *et al.* 2005). Work completion also included detailed CATSCAN analysis of cores provided as part of the PROMESS project and cores taken in the Cap de Creus Canyon (CCC, Southwestern end of Gulf of Lions) as part of the October 2004 EuroSTRATAFORM cruise (leg 2). All the CCC cores were logged onboard the Oceanus using the USGS Multi Sensor Core Logger, and deck work also included fall cone testing and water content measurements. Once at Laval, all the CCC cores were run through the CATSCAN. All these results have been put in a report available on the internet for everyone (Sancoucy *et al.* 2005). Seven, approximately 25 cm long, subsections from the deep PROMESS borings in the Adriatic Sea and Gulf of Lions were provided to the USGS and Laval by our European collaborators. These subsections were analyzed in detail with the CATSCAN system in order to determine the effect of gas disturbance on the sampling quality and strength. Work on these PROMESS cores also included detailed physico-chemical, mineralogical, microstructural, porosimetry, and geotechnical analyses. Geotechnical testing on CCC cores has been initiated both at Laval and at the USGS, and includes Atterberg limits, water content, strength tests (intact and remoulded) using the Swedish fall cone testing, and cyclic and static direct simple shear tests (at USGS). Rheological tests were also carried out on a selected mixture of CCC samples. Work completion in FY05 also included papers prepared for various conferences and journals (Cauchon-Voyer *et al.* 2005; Sancoucy *et al.* 2005; Lee *et al.* 2004; Lee, 2005; Tappin and Lee, 2005; Locat

2005, Locat *et al.* 2005) and to a special book on debris flows (Locat and Lee 2005). FY\_05 also included the completion of a major contribution to the Master Volume of STRATAFORM (Lee, Locat, et al., 2005, Ch. 5).

## RESULTS

CATSCAN analyses of PROMESS cores, taken in both the Adriatic Sea and the Gulf of Lions (GOL) have revealed the presence of significant artifacts likely due to gas expansion after coring. For the GOL cores, in situ tests, carried out as part of PROMESS, show that a depth of 20 m corresponds more or less to the depth below which strength results from in situ testing and laboratory testing start to diverge. Below 20 m, the laboratory tests indicate a much lower strength compared with in situ values. Cores from the Adriatic Sea and Gulf of Lions (GOL) have very different compositions. The Adriatic sediments have a significant amount of smectite compared to the GOL samples, and this impacts their plasticity index, specific surface area, and cation exchange capacity.

As part of EuroSTRATAFORM a portion of the Cap de Creus Canyon has been selected for a detailed analysis of slope instability. The selected area is located on the north side of the Canyon in water depths ranging between 280m and 750m. This sector presents evidence of landsliding which has led to the accumulation of debris at the toe of the slope. The headwall escarpment is about 30m high at a slope of 27° whereas the failure plane is inclined at about 20° and is about 450m wide. The slope of the debris where sample PCFL-665 (Fig. 1) was taken is at about 5° reducing to about 1° near the thalweg. Sample

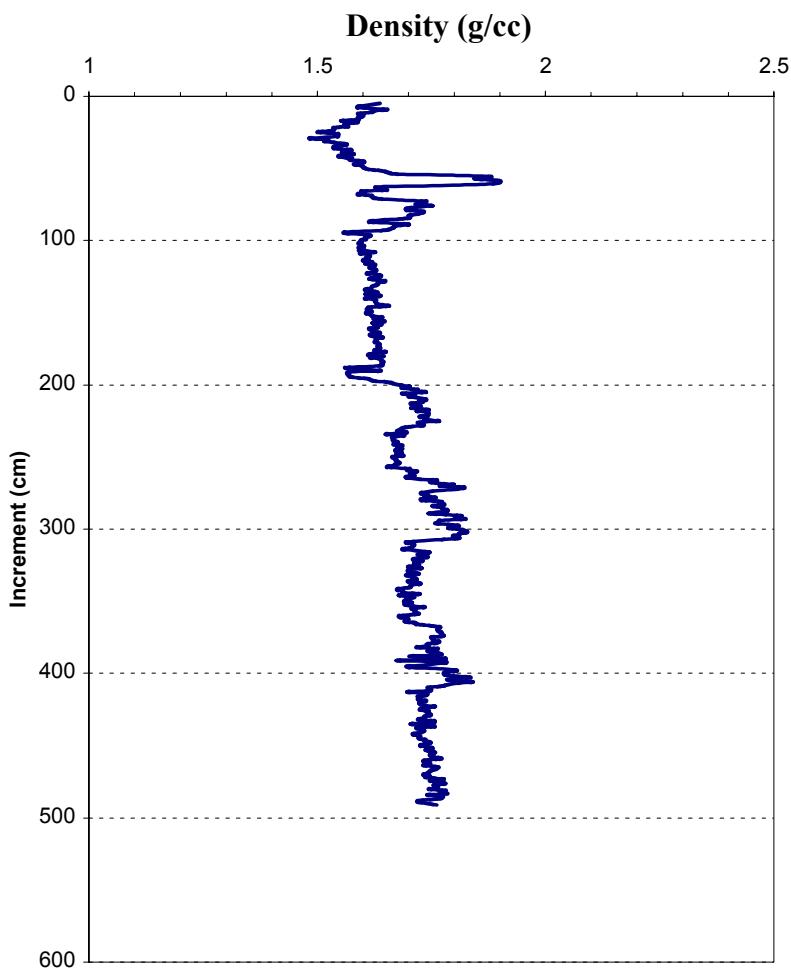

**Figure 1. Multi-sensor whole core density log of piston core PCFL-665 showing several higher density zones indicative of debris flow deposits.**

PCFL-665 has been analyzed in order to determine the nature of the sediments along with the geotechnical and rheological properties. The profile is composed of two facies: a homogenous (hemipelagic ?) brownish grey clay with a plasticity index of about 47% and a bluish grey clay of lower plasticity (24%) and of variable water content which is present in the form of clasts reaching about 5cm in diameter with a water content around 40%. These units are interpreted as corresponding to debris flow events. A minimum of three events has been identified in the core. The water content, liquidity index and strength profiles are also quite different between the two units. The hemipelagic clay exhibits a typical decrease in water content and liquidity index and an equivalent increase in strength and densitywith depth. In the debris flow units, the density, liquidity index and strength in the fine portion just above the clast layer are nearly constant. Reasons for these differences are being investigated.

## **IMPACT/APPLICATION**

Results obtained in FY05 provide a unique opportunity to demonstrate the potential of CATSCAN analysis in understanding the geotechnical properties of sediments along with the sediment sedimentary structures. Rheological testing of Cap de Creus sediments has strengthened the usefulness of the liquidity index as a way of estimating basic rheological properties of muds. Our results can also be used to improve strength development models used for analyzing sediment accumulation and stability.

## **TRANSITIONS**

Our CATSCAN analyses and multi-sensor track profiling of various cores illustrate the value in using these non-destructive methods to study sediment architecture and properties. Rheological properties are being used by modelers to represent debris flows (Imran *et al.* 2001). Offshore research groups interested in margins and in oil and energy development were used as a platform to present our knowledge on submarine slope stability and hazard acquired as part of STRATAFORM and EuroSTRATAFORM. We have also contributed to a major effort in assembling our knowledge on submarine debris flows and their consequences by publishing a chapter on this topic (Locat and Lee 2005). We also transferred our knowledge developed as part of STRATAFORM to those interested in mass movements analysis (Locat 2005).

## **RELATED PROJECTS**

Lee has developed a USGS project to investigate sediment and pollutant transport on the Los Angeles margin that uses techniques produced by STRATAFORM. The development of this project benefited from approaches developed within STRATAFORM. A group of Canadians led by J. Locat, and H. Lee developed a new project in collaboration with project COSTA (COntinental Slope STAbility) in Europe that will last until the end of October 2005. We have been very active in establishing IGCP-511: a UNESCO International Geological Cooperation Program on submarine mass movements and their consequences (2005-2009).

## **REFERENCES**

- Imran, J., Parker, G., Locat, J., and Lee, H., 2001. A 1-D numerical model on muddy subaqueous and subareial debris flows. Submitted to ASCE Journal of Hydraulic Engineering. 127: 959-968.
- Locat, J., 1997. Normalized rheological behaviour of fine muds and their low properties in a pseudoplastic regime. ASCE, First Conference on Debris Flows Hazards Mitigation, Mechanics, Prediction and assessment, pp.: 260-269.
- Locat, J., and Mienert, J., 2003. Submarine Mass Movements and Their Consequences. Kluwer Series on Advances in Natural and Technological Hazards No. 19, 540p. [published, refereed]

## PUBLICATIONS

Cauchon-Voyer, G., Locat, J., Lee, H., Sultan, N., Berné, S., Canals, M., and Trincardi, F., 2005. A comparative microanalysis of the Gulf of Lions PRGL1-5 and Adriatic Sea PRAD2-5 sediments physico-chemical properties and microstructure. Abstract submitted for the Salamanca Annual meeting.

Lee, H., 2005. Undersea landslides: extent and significance in the Pacific Ocean, an update. Natural Hazards and Earth System Sciences [refereed, in press]

Lee, H.J., Locat, J., Orzech, K., and Sansoucy, M., 2005. Shear strength development on continental margins: from the laboratory to PROMESS. Abstract submitted for the Salamanca Annual meeting

Lee, H.J. , Locat, J., Desgagnés, P., Parson, J., McAdoo, B., Orange, D., Puig, P., Wong, F., Dartnell, P., and Boulanger, É., 2005. Submarine Mass Movements. In: Continental-margin Sedimentation: Transport to Sequence, Nitrouer et a. Ed., Ch., 5 [refereed, submitted]

Lee, H.J., Orzech, K., Locat, J., Konrad, J.-M., and Boulanger, E., 2004. Seismic strengthening, a conditioning factor influencing submarine landslide development, Proceedings, 57<sup>th</sup> Canadian Geotechnical Conference, Session 7G, 7 pp. [published]

Lévesque, M.-C., Locat, J., Leroueil, S. and Lee, H., 2004. Potential bias caused by bioturbation on physical properties of the Po Delta recent sediments. Continental Research, Special Volume on the Adriatic [refereed, under review]

Locat, J., 2005. Geotechnical criteria for submarine slope instability: from field to models. 2<sup>nd</sup> International Symposium on Submarine Mass Movements and Their Consequences, Oslo, September, Keynote paper, 2005, pp.: xx-yy [published].

Locat, J., and Lee. H.J., 2004. Subaqueous Debris Flows. In: *Debris Flows Hazards and Related Phenomena*, O. Hungr and M. Jakob Ed., Ch. 9, pp.: 203-245. . [published, refereed]

Locat, J., Lee, H., Sultan, N., Berné, S., Canals, M., Trincardi, F., and Leroueil, S., 2005. Strata formation analysis using the liquidity index: an application to the Adriatic and Gulf of Lions sediments. Abstract submitted for the Salamanca Annual meeting.

Sansoucy, M., Lee, H., Cauchon-Voyer, G., and Locat, J., 2005. CATSCAN and MST Profiling of Cores Taken as Part of Leg 2 of the RV Oceanus Cruise of October in the Gulf of Lions Region-Project EuroSTRATAFORM. Department of Geology and Geological Engineering, Laval University, 58 p.

Sansoucy, M., Locat, J., Lee, H., Orange, D., and Jeong, S.W., 2005. Preliminary analysis of the geotechnical and rheological properties of Cap de Creus sediments with some consideration on slope instability issues. Abstract submitted for the Salamanca Annual meeting.

Tappin, D. and Lee, H. (Eds.) (2005) Special Issue on Tsunami Hazard from Slope Instability. Natural Hazards in Earth System Sciences [refereed, in press]